

C 05



1K SINGLE COAT SYSTEM



PRODUCT

URKI-RAPID/70 SEMIGLOSS SINGLE COAT O/D

FIELD OF APPLICATION

System specially designed for agricultural machinery, public works, fork lifts, metallic structures, containers, etc.

use of high pressure equipment in difficult geometry parts where high thickness can be applied. Semigloss finish with good extensibility, quick drying and direct adhesion on steel.

Its tixotropical aspect allows, with a minimum risk of sagging, the

PHYSICAL PROPERTIES

	Urki-Rapid/70
Type of product	Modified Alkyd
Density 20° C	1,10 - 1,25
Supply viscosity at 20° C	70 KU (Stormer)
Solid Content (% weight)	53%
Solid Content (% volume)	41%
V.O.C.	591 g/l (ready to use)
Color	s/m URKI-SYSTEM




SURFACE PREPARATION: STEEL

The surfaces should be thoroughly degreased and deoxidized.

C 05

1K SINGLE COAT SYSTEM

APPLICATION URKI-RAPID/70

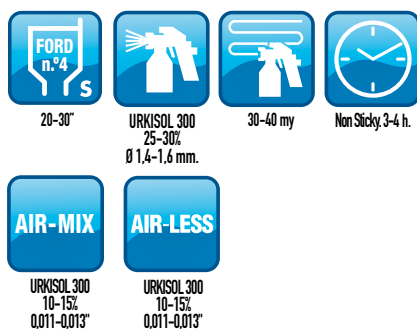

FEATURES OF DRY FILM

	Urki-Rapid/70
Theoretical yield	12 - 13 m ² / l. (35 my)
Gloss 60 - 60°	>70%
Recoatibility	Before 1 h. or after 3 days

RESISTANCE AND CERTIFICATES

This system resists 150 hours on the Salt Spray Test in accordance to ISO 9227:2007.

If a higher resistance is required, use on F- 862 or F- 29.



150 H SALT SPRAY TEST